

# PRODUCT DATASHEET

## DOWNLIGHTS|SPOTLIGHTS-MINI

Downlights | Recessed mounted spotlight|3w|Round shape

Code# MN03007-3



---

### Areas of Application

- Shops
- Hotel
- Villa
- Office
- Gallery
- Showroom

---

### Product Features

- High luminous efficacy
- Die-cast aluminum housing, ensure excellent heat dissipation
- Energy savings of up to 90% compared to halogen lamp spotlights
- Low light reflective cover, polarized light washes the wall, and uniform illumination
- CCT optional and dimmable
- Easy and quick installation

---

## Complete Product Data

Code#	MN03007-3
Wattage	3w
Installation Type	Recessed
Dimension	φ40mm*H32mm
Cutout	φ35mm
IP Rating	IP20
Luminous Flux	210lm
Beam Angle	30°
Working Temperature	-25℃ ~55℃
Certificates	/
Warranty	3 Years
Packing Size	/

## Driver Data

Driver Brand	Tridonic, Osram, Philips, Lifud, Euchips, Eaglerise, etc.
Input Voltage	100-250VAC 50/60hz
Output Voltage	10-24Vdc
Output Current	250mA
Power Factor	>0.5 as standard; >0.9 optional
Efficiently	87% @230v
IP Rating	IP20
Dimmable	Non-Dimmable/Triac/0-10v/Dali Optional
Free Flicker	Yes
Certificates	CE, CB, CCC, ENEC
Warranty	3/5 Years



## Material&Housing Data

Housing Color	White/Black
Reflector Color	Black
Housing Material	Die-casting Aluminum

## Photometric Data

LED chip brand	Cree/ Osram /Bridgelux/ Epistar etc.
Chip Type	COB
Color Temperature	2700K, 3000K, 4000K, 5000K, 6000K
CRI	>80, >90
Life time	>50000Hrs
Lumens efficacy	100-120lm/w

## Dimensions&Installation

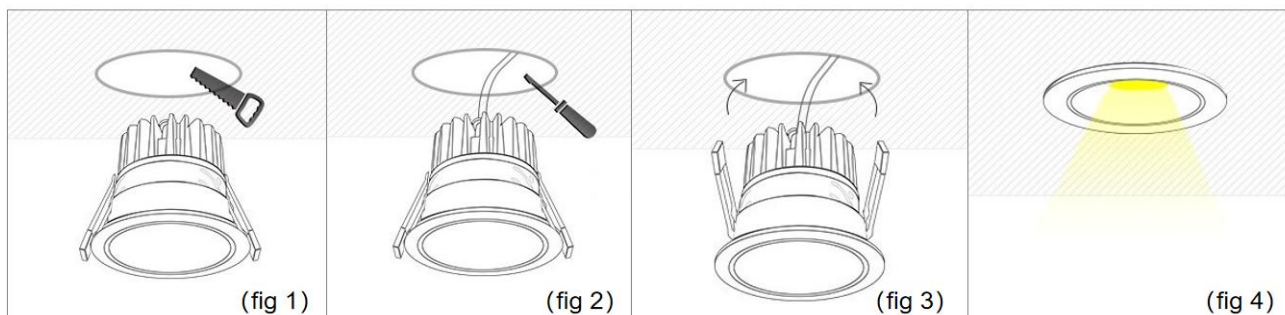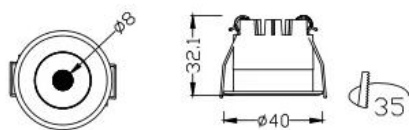

**PLEASE FIND A QUALIFIED ELECTRICIAN FOR INSTALLATION.** Please read the instructions before you install and use the downlight.

1. Make sure the power is turned off in which you are installing the products.
2. Measure the ceiling opening to make sure the edge of the downlight will cover the entire hole and still sit firmly in the ceiling before proceeding. (Fig 1)
3. Connecting wires to power source (black to hot, white to neutral ). (Fig 2)
4. Squeeze the two housing clips so they are in an upright position and insert lamp into housing. (Fig 3)
5. Once lamp is inside the housing, release the housing clips and continue pushing lamp into housing until securely fixed and flush with ceiling.
6. Restore power at the source and the installation is completed. (Fig 4)