

PRODUCT DATASHEET

DOWNLIGHTS | SPOTLIGHTS-IP RATED

Downlights | Recessed mounted spotlight | 40w | Round shape | IP65 | Anti-Glare Code# WP03003-40



Areas of Application

- Bathroom, washroom, kitchen
- Outdoor aisle, Corridor
- Bars, restaurants
- Office Room
- Shops
- stairways, entrance areas
- Galleries











Product Features

- High luminous efficacy
- IP65
- Die-cast aluminum housing, ensure excellent heat dissipation
- Uniform light output and good consistency
- CCT optional and dimmable
- CRI>90
- Easy and quick installation
- Anti-glare, 4 colors selectable for reflector
- 3 years warranty

Complete Product Data

Code#	WP03003-40	
Wattage	40w	
Installation Type	Recessed	
Dimension	ф230mm*H128mm	
Cutout	ф200mm	
IP Rating	IP65	
Luminous Flux	3200lm	
Beam Angle	50°	
Working Temperature	-25℃~55℃	
Certificates	/	
Warranty	3 Years	
Packing Size	/	

Driver Data

Tridonic, Osram, Philips, Lifud, Euchips, Eaglerise, etc.
100-250VAC 50/60hz
30-38.5Vdc
1050mA
>0.5 as standard; >0.9 optional
93% @230v
IP rated
Non-Dimmable/Triac/0-10v/Dali Optional
Yes
CE, CB, CCC, ENEC
3/5 Years

Material&Housing Data


Housing Color	White/Black
Housing Material	Die-casting Aluminum
Reflector Color	White/Black/Matt silver/Glossy silver Golden


Photometric Data

LED chip brand	Cree/ Osram /Bridgelux/ Epistar etc.
Chip Type	СОВ
Color Temperature	2700К, 3000К, 4000К, 5000К, 6000К, 6500К
CRI	>80, >90
Life time	>50000Hrs
Lumens efficacy	110-120lm/w

Dimensions&Installation



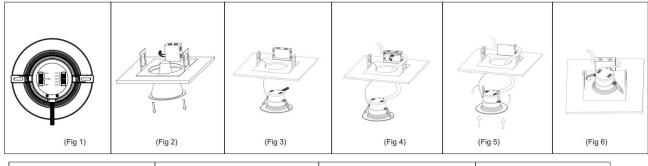

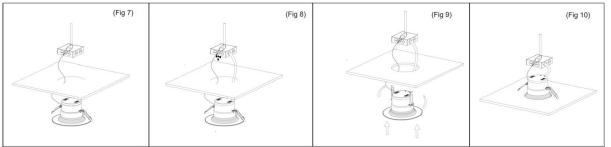

PLEASE FIND A QUALIFIED ELECTRICIAN FOR INSTALLATION. Please read the instructions before you install and use the downlight.

- 1. Make sure the power is turned off in which you are installing the products.
- 2. If existing lamp and trim are present, remove from ceiling or move it out of the way as it will not be needed during installation. Measure the ceiling opening to make sure the edge of the downlight will cover the entire hole and still sit firmly in the ceiling before proceeding. (Fig 2)
- 3. Insert lamp conduit into the box and wire to power source (black to hot, white to neutral) (Fig. 4).
- 4. Squeeze the two housing clips so they are in an upright position and insert lamp into housing. (Fig 5)
- 5. Once lamp is inside the housing, release the housing clips and continue pushing lamp into housing until securely fixed and flush with ceiling. (Fig 6)
- 6. Restore power at the source and the installation is complete.